

DV-16230**Mechanical Data**

Item	Standard Value	Unit
Module Dimensions	85.0(W) X 29.5(H) X 10.0(D)	mm
Viewing Area	62.5(W) X 17.2(H)	mm
Dot Size	0.50(W) X 0.55(H)	mm
Dot Pitch	0.57(W) X 0.62(H)	mm

Absolute Maximum Ratings

Item	Symbol	Standard Value			Unit
		Min.	Typ.	Max.	
Supply Voltage for Logic	$V_{dd} - V_{ss}$	-0.3	--	7.0	V
Supply Voltage for LCD Drive	$V_{dd} - V_{ee}$	$V_{dd}-13.5$	--	$V_{dd}+0.3$	V
Input Voltage	V_I	-0.3	--	$V_{dd}+0.3$	V
Operation Temperature	T_{opr}	0	--	50	°C
Storage Temperature	T_{stg}	-20	--	70	°C

Electrical Characteristics


Item	Symbol	Condition	Standard Value			Unit
			Min.	Typ.	Max.	
Input "High" Voltage	V_{IH}	--	2.2	--	V_{dd}	V
Input "Low" Voltage	V_{IL}	$-I_{OH}=0.205mA$	0	--	0.6	V

Output "High" Voltage	V_{OH}	$I_{OL}=1.2mA$	--	--	0.4	V
Output "Low" Voltage	V_{OL}		--	--	0.4	V
Supply Current	I_{dd}	$V_{dd} = 5V$	--	1.9	5.0	mA

Pin Assignment

No.	Symbol.	Function.	No.	Symbol.	Function.
1	V_{DD}	+5V	8	DB1	Data Bus Line
2	V_{SS}	GND,0V	9	DB2	Data Bus Line
3	V_{EE}	For LCD Drive	10	DB3	Data Bus Line
4	RS	Function Select	11	DB4	Data Bus Line
5	R/W	Read/Write	12	DB5	Data Bus Line
6	E	Enable Signal	13	DB6	Data Bus Line
7	DB0	Data Bus Line	14	DB7	Data Bus Line

Block Diagram

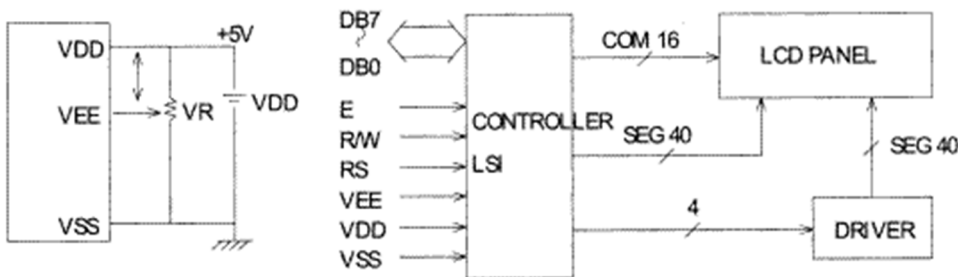

External Dimensions

