


**TV SOUND SYSTEM**

The KA2102A is a silicon monolithic integrated circuit designed for SIF and audio section in television receivers. This IC has all functions including sound IF amplifier, FM detector, DC volume control circuit, audio output amplifier with 2.4 Watts output power and voltage regulator. This IC is encapsulated in 14 pin dual in-line package with heat tab.

**FEATURES**

- Wide power supply range, 9V ~ 18V  
 2.4 Watt, at  $V_{CC} = 18V$ ,  $R_L = 8\Omega$  (For 17" TV)  
 1.2 Watt, at  $V_{CC} = 12V$ ,  $R_L = 8\Omega$  (For 12" TV)
- Linear volume control
- Low harmonic distortion
- Differential peak detector
- Enough attenuation (Typ, 80dB) by squelch circuit

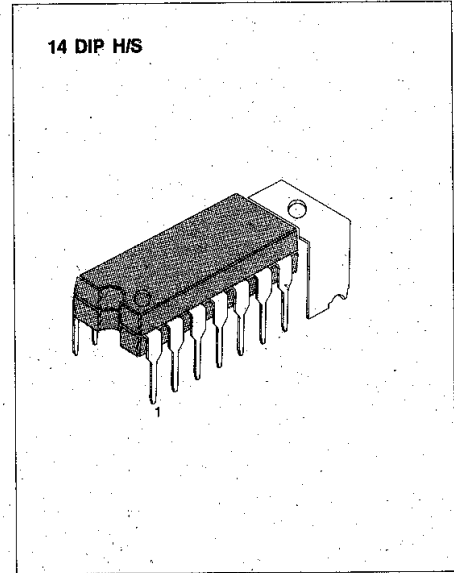

**TYPICAL APPLICATION CIRCUIT**

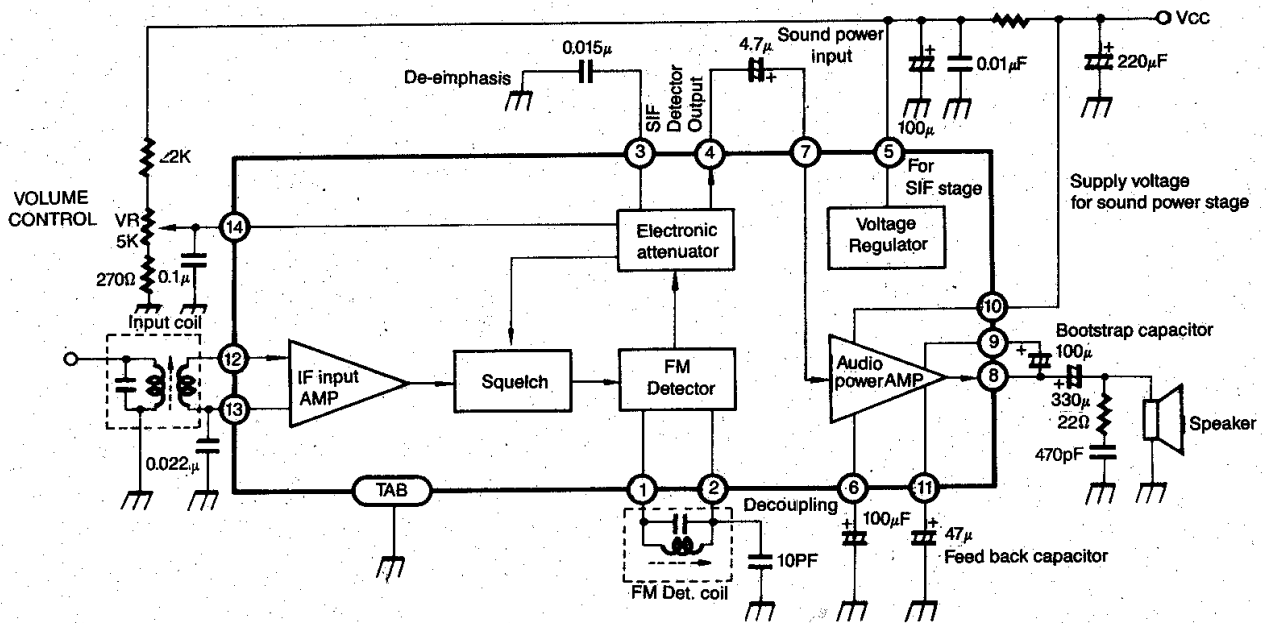


Fig. 1

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Characteristic	Symbol	Value	Unit
Supply Voltage (Pin 10)	$V_{10}$	20	V
Supply Current (Pin 10)	$I_{10}$	1	A
Supply Current (Pin 5)	$I_5$	100	mA
Input Signal Voltage	$V_i$	3	$V_{p-p}$
Power Dissipation	$P_{d1}$	0.8 ( $T_a = 75^\circ\text{C}$ ) free air	W
Power Dissipation	$P_{d2}$	1.4*	W
Operating Temperature	$T_{opr}$	-20 ~ +75	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ +150	$^\circ\text{C}$

\* Printed Circuit Copper Area  $50 \times 50 \text{mm}^2$ ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )1. IF STAGE ( $V_{CC} = 12\text{V}$ ,  $R_B = 100\Omega$ ,  $V_{i4} \geq 1.3\text{V}$ ,  $f_o = 4.5\text{MHz}$ ,  $f_m = 400\text{Hz}$ ,  $f = \pm 25\text{KHz}$ ,  $R_G = 50\mu\Omega$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Pin 5 Voltage	$V_{5A}$		7.5	8.0	8.5	V
Pin 5 Voltage	$V_{5B}$	$V_{CC} = 18\text{V}$ , $R_B = 330\Omega$	7.5	8.0	8.5	V
Pin 10 Current	$I_{10A}$	No Input Signal	14	19	24	mA
Pin 10 Current	$I_{10B}$	$V_{CC} = 18\text{V}$ , $R_B = 330\Omega$ No Input Signal	16	28	35	mA
IF Limiting Voltage	$V_i$ (lim)	$V_{OAF}$ ( $V_i = 10\text{mVrms}$ ). -3dB	—	200	400	$\mu\text{Vrms}$
Detector Output Voltage	$V_{OAF}$	$V_i = 10\text{mVrms}$	300	360	—	mVrms
Detector Distortion	$\text{THD}_1$	$V_i = 10\text{mVrms}$	—	0.7	—	%
AM Rejection	AMR	AM Mod 30% $f_m = 400\text{Hz}$ $V_i = 10\text{mVrms}$	-40	-50	—	dB
Maximum Attenuation	ATTmax	$V_{i4} = 0\text{V}$	-60	-80	—	dB

2. SOUND POWER STAGE ( $V_{CC} = 12\text{V}$ ,  $R_B = 100\Omega$ ,  $R_L = 8\Omega$ ,  $f = 400\text{Hz}$ ,  $R_G = 600\Omega$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Sound Stage Voltage Gain	$G_{VAF}$	$V_i = 30\text{mVrms}$	33	37	41	dB
Sound Output Power	$P_{oA}$	$\text{THD} = 10\%$	0.9	1.2	—	W
Sound Output Power	$P_{oB}$	$V_{CC} = 18\text{V}$ , $R_B = 330\Omega$ $\text{THD} = 10\%$	2.0	2.4	—	W
Sound Output Distortion	$\text{THD}_{2A}$	$P_o = 0.5\text{W}$	—	0.6	2.0	%
Sound Output Distortion	$\text{THD}_{2B}$	$V_{CC} = 18\text{V}$ , $R_B = 330\Omega$ $P_o = 0.5\text{W}$	—	0.5	2.0	%
Overall Sound Output Distortion (IF + Sound Power Stage)	$\text{THD}_3$	$P_o = 0.5\text{W}$ $V_i = 10\text{mVrms}$	—	1.5	4.0	%

3. TYPICAL DATA

Characteristic	Symbol	Test Conditions	Value	Unit
Pin 10 Current	$I_{10}$	THD <sub>2A</sub> = 10%	200-210	mA
Pin 10 Current	$I_{10}$	THD <sub>2B</sub> = 10%	270-280	mA
Sound Output Power	PoA	THD = 3%	1.1	W
Sound Output Power	PoB	V <sub>CC</sub> = 18V, R <sub>B</sub> = 330Ω THD = 3%	2.0	W
Sound Stage Band Width	BW	-3dB	50 ~ 50K	Hz

TEST CIRCUIT

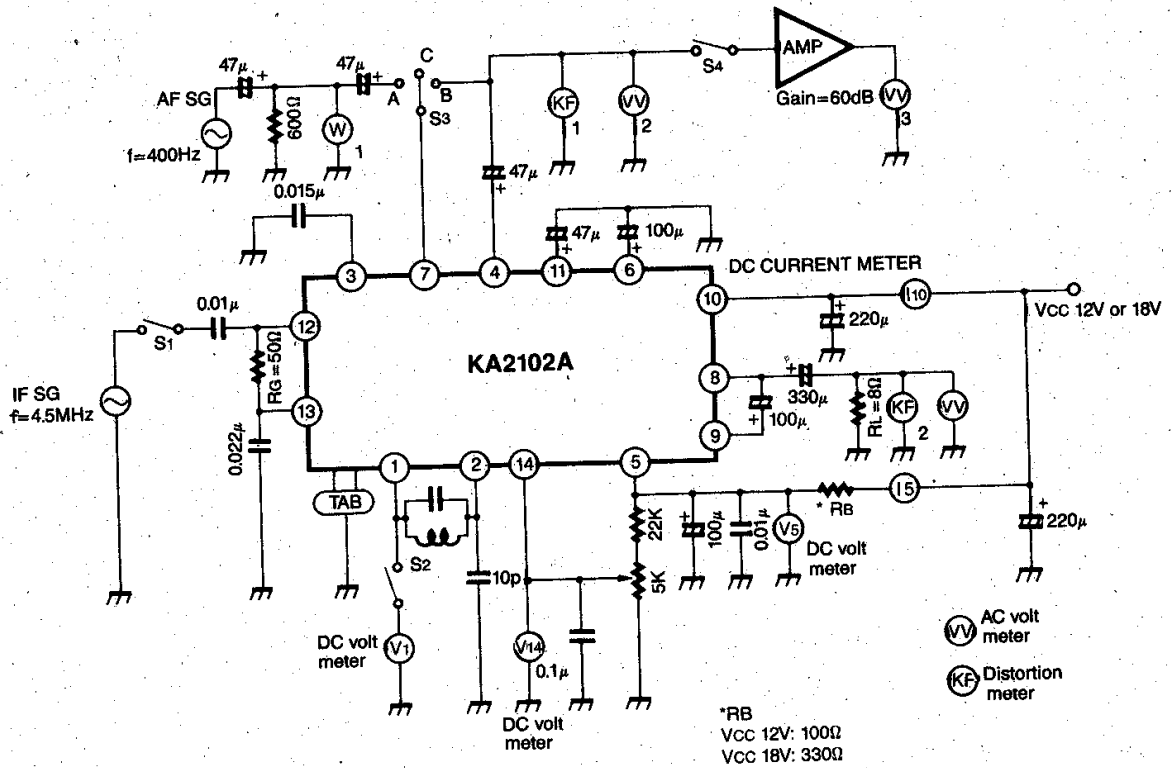


Fig. 2