

VERY LOW DROP VOLTAGE REGULATORS WITH INHIBIT


- VERY LOW DROPOUT VOLTAGE (0.2V TYP)
- VERY LOW QUIESCENT CURRENT (TYP. 50 μ A IN OFF MODE, 0.5 mA IN ON MODE, NO LOAD)
- OUTPUT CURRENT UP TO 100 mA
- OUTPUT VOLTAGES OF 1.25; 1.5; 2.5; 3; 3.3; 3.5; 4; 4.5; 4.7; 5; 5.2; 5.5; 6; 8V
- INTERNAL CURRENT AND THERMAL LIMIT
- ONLY 2.2 μ F FOR STABILITY
- AVAILABLE IN \pm 1% (A) OR \pm 2% (C) SELECTION AT 25°C
- SUPPLY VOLTAGE REJECTION: 80db (TYP.)
- TEMPERATURE RANGE: -40 TO 125 °C

DESCRIPTION

The LE00 regulator series are very Low Drop regulators available in SO-8 and TO-92 packages and in a wide range of output voltages.

The very Low Drop voltage (0.2V) and the very low quiescent current make them particularly suitable for Low Noise Low Power applications and specially in battery powered systems.

They are pin to pin compatible with the older L78L00 series. Furthermore in the 8 pin configuration (SO-8) they employ a Shutdown Logic Control (pin 5, TTL compatible). This means that when the device is used as a local regulator,

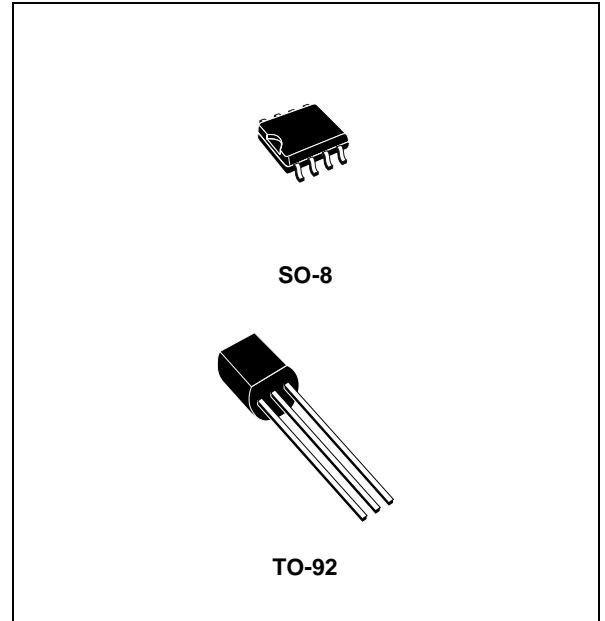

it's possible to put in stand by a part of the board even more decreasing the total power consumption. In the three terminal configuration (TO-92) the device is even in ON STATE, maintaining the same electrical performances. It needs only 2.2 μ F capacitor for stability allowing room and cost saving effect.

SCHEMATIC DIAGRAM

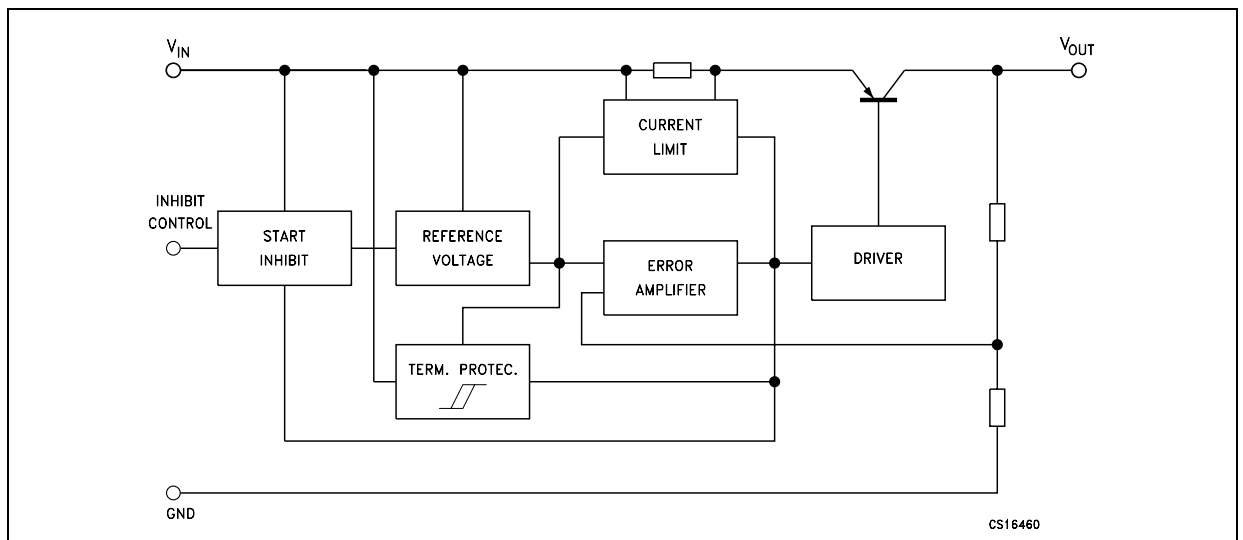


Table 1: Absolute Maximum Ratings


| Symbol | Parameter | Value | Unit |
|-----------|--------------------------------------|------------------------|------|
| V_I | DC Input Voltage | 20 | V |
| I_O | Output Current | Internally Limited (*) | |
| P_{tot} | Power Dissipation | Internally Limited (*) | |
| T_{stg} | Storage Temperature Range | -40 to 150 | °C |
| T_{op} | Operating Junction Temperature Range | -40 to 125 | °C |

(*) Our SO-8 package used for Voltage Regulators is modified internally to have pins 2, 3, 6 and 7 electrically communed to the die attach flag. This particular frame decreases the total thermal resistance of the package and increases its ability to dissipate power when an appropriate area of copper on the printed circuit board is available for heatsinking. The external dimensions are the same as for the standard SO-8.

Table 2: Thermal Data

| Symbol | Parameter | SO-8 | TO-92 | Unit |
|----------------|-------------------------------------|------|-------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case | 20 | | °C/W |
| $R_{thj-amb}$ | Thermal Resistance Junction-ambient | 55 | 200 | °C/W |

Figure 1: Test Circuits

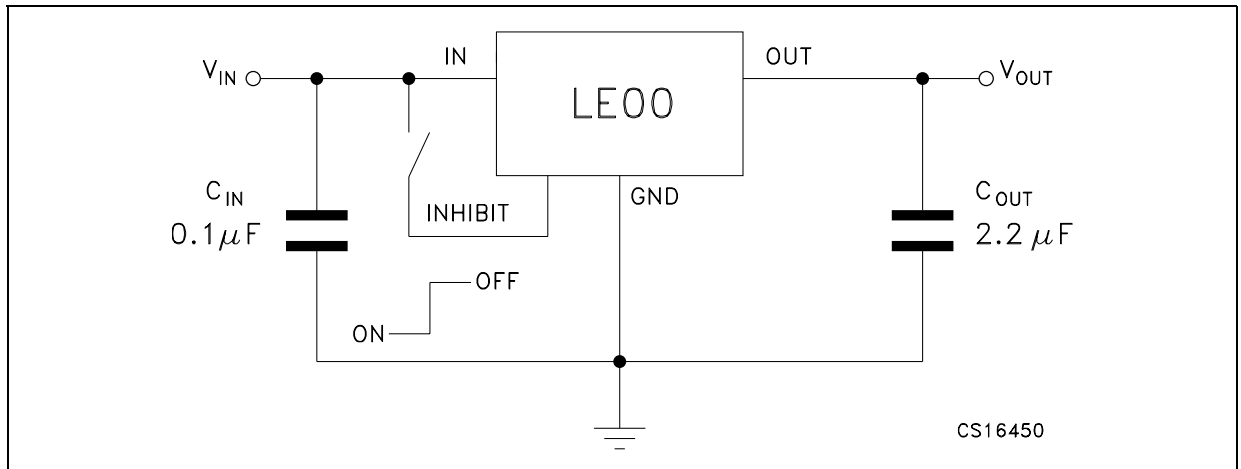

Note: If the Inhibit pin is left floating, the regulator is in ON mode. However, to avoid any noise picking-up, it is suggested to ground it when the Inhibit function is not used.

Figure 2: Pin Connection (top view)

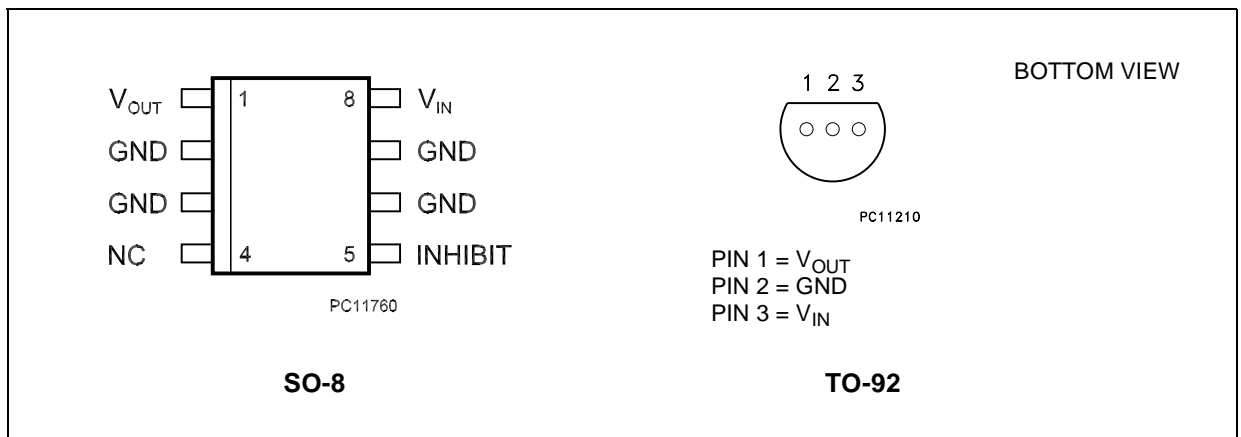


Table 3: Ordering Codes

| TYPE | SO-8 (*) | TO-92 (#) | OUTPUT VOLTAGE |
|---------|----------|-----------|----------------|
| LE12AB | LE12ABD | LE12ABZ | 1.25 V |
| LE12C | LE12CD | LE12CZ | 1.25 V |
| LE15AB | LE15ABD | LE15ABZ | 1.5 V |
| LE15C | LE15CD | LE15CZ | 1.5 V |
| LE25AB | LE25ABD | LE25ABZ | 2.5 V |
| LE25C | LE25CD | LE25CZ | 2.5 V |
| LE27AB | LE27ABD | LE27ABZ | 2.7 V |
| LE27C | LE27CD | LE27CZ | 2.7 V |
| LE30AB | LE30ABD | LE30ABZ | 3 V |
| LE30C | LE30CD | LE30CZ | 3 V |
| LE33AB | LE33ABD | LE33ABZ | 3.3 V |
| LE33C | LE33CD | LE33CZ | 3.3 V |
| LE35AB | LE35ABD | LE35ABZ | 3.5 V |
| LE35C | LE35CD | LE35CZ | 3.5 V |
| LE40AB | LE40ABD | LE40ABZ | 4 V |
| LE40C | LE40CD | LE40CZ | 4 V |
| LE45AB | LE45ABD | LE45ABZ | 4.5 V |
| LE45C | LE45CD | LE45CZ | 4.5 V |
| LE47AB | LE47ABD | LE47ABZ | 4.7 V |
| LE47C | LE47CD | LE47CZ | 4.7 V |
| LE50AB | LE50ABD | LE50ABZ | 5 V |
| LE50C | LE50CD | LE50CZ | 5 V |
| LE52AB | LE52ABD | LE52ABZ | 5.2 V |
| LE52C | LE52CD | LE52CZ | 5.2 V |
| LE55AB | LE55ABD | LE55ABZ | 5.5 V |
| LE55C | LE55CD | LE55CZ | 5.5 V |
| LE60AB | LE60ABD | LE60ABZ | 6 V |
| LE60C | LE60CD | LE60CZ | 6 V |
| LE80AB | LE80ABD | LE80ABZ | 8 V |
| LE80C | LE80CD | LE80CZ | 8 V |
| LE120AB | LE120ABD | LE120ABZ | 12 V |
| LE120C | LE120CD | LE120CZ | 12 V |

(*) Available in Tape & Reel with the suffix "-TR".

(#) Available in Tape & Reel with the suffix "-TR" and in Ammopak with the suffix "-AP".

Table 4: Electrical Characteristics For LE12AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 3.3 \text{ V}$ | 1.225 | 1.25 | 1.275 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 3.3 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 1.2 | | 1.3 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | 2.5 | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV | |
| ΔV_O | Load Regulation | $V_I = 2.8 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV | |
| I_d | Quiescent Current | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 3.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | | 82 | dB | |
| | | | $f = 1 \text{ KHz}$ | | 77 | | |
| | | | $f = 10 \text{ KHz}$ | | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | 1.25 | | V | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 5: Electrical Characteristics For LE12C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 3.3 \text{ V}$ | 1.225 | 1.25 | 1.275 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 3.3 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 1.2 | | 1.3 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | 2.5 | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV | |
| ΔV_O | Load Regulation | $V_I = 2.8 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV | |
| I_d | Quiescent Current | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 3.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | | 82 | dB | |
| | | | $f = 1 \text{ KHz}$ | | 77 | | |
| | | | $f = 10 \text{ KHz}$ | | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | 1.25 | | V | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 6: Electrical Characteristics For LE15AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_I = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 3.5 \text{ V}$ | 1.47 | 1.5 | 1.53 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 3.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 1.44 | | 1.56 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | 2.5 | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV | |
| ΔV_O | Load Regulation | $V_I = 2.8 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV | |
| I_d | Quiescent Current | $V_I = 2.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 2.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 3.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | | 82 | | dB |
| | | | $f = 1 \text{ KHz}$ | | 77 | | |
| | | | $f = 10 \text{ KHz}$ | | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | 1 | | V | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 7: Electrical Characteristics For LE15C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_I = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 3.5 \text{ V}$ | 1.47 | 1.5 | 1.53 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 3.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 1.44 | | 1.56 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | 2.5 | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 2.5 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV | |
| ΔV_O | Load Regulation | $V_I = 2.8 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV | |
| I_d | Quiescent Current | $V_I = 2.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 2.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 3.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | | 82 | | dB |
| | | | $f = 1 \text{ KHz}$ | | 77 | | |
| | | | $f = 10 \text{ KHz}$ | | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | 1 | | V | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 8: Electrical Characteristics For LE25AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 4.5 \text{ V}$ | 2.475 | 2.5 | 2.525 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 4.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.45 | | 2.55 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 3.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV |
| ΔV_O | Load Regulation | $V_I = 3.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 3.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 3.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 4.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 82 | | dB |
| | | | $f = 1 \text{ KHz}$ | 77 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 9: Electrical Characteristics For LE25C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 4.5 \text{ V}$ | 2.45 | 2.5 | 2.55 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 4.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.4 | | 2.6 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 3.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 3.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 3.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 3.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 4.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 82 | | dB |
| | | | $f = 1 \text{ KHz}$ | 77 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 10: Electrical Characteristics For LE27AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 4.7 \text{ V}$ | 2.673 | 2.7 | 2.727 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 4.7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.646 | | 2.754 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 3.4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV | |
| ΔV_O | Load Regulation | $V_I = 3.7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV | |
| I_d | Quiescent Current | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 4.7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 82 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 77 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 11: Electrical Characteristics For LE27C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 4.7 \text{ V}$ | 2.646 | 2.7 | 2.754 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 4.7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.592 | | 2.808 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 3.4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV | |
| ΔV_O | Load Regulation | $V_I = 3.7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV | |
| I_d | Quiescent Current | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 4.7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 82 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 77 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 12: Electrical Characteristics For LE30AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5 \text{ V}$ | 2.970 | 3 | 3.030 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.940 | | 3.060 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV |
| ΔV_O | Load Regulation | $V_I = 4 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 4 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 4 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 81 | | dB |
| | | | $f = 1 \text{ KHz}$ | 76 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 13: Electrical Characteristics For LE30C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5 \text{ V}$ | 2.940 | 3 | 3.060 | |
| | | $I_O = 10 \text{ mA}$, $V_I = 5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 2.880 | | 3.120 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 3.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 4 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 4 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 4 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 81 | | dB |
| | | | $f = 1 \text{ KHz}$ | 76 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 14: Electrical Characteristics For LE33AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5.3 \text{ V}$ | 3.267 | 3.3 | 3.333 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 5.3 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.234 | | 3.366 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV | |
| ΔV_O | Load Regulation | $V_I = 4.3 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV | |
| I_d | Quiescent Current | $V_I = 4.3 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 4.3 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5.3 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 80 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 75 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 15: Electrical Characteristics For LE33C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5.3 \text{ V}$ | 3.234 | 3.3 | 3.366 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 5.3 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.168 | | 3.432 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV | |
| ΔV_O | Load Regulation | $V_I = 4.3 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV | |
| I_d | Quiescent Current | $V_I = 4.3 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 4.3 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5.3 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 80 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 75 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 16: Electrical Characteristics For LE35AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|-------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5.5 \text{ V}$ | 3.465 | 3.5 | 3.535 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 5.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.43 | | 3.57 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 4.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 15 | mV | |
| ΔV_O | Load Regulation | $V_I = 4.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV | |
| I_d | Quiescent Current | $V_I = 4.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 4.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 79 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 74 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 17: Electrical Characteristics For LE35C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit | |
|--------------|---------------------------|--|----------------------|------|------|---------------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 5.5 \text{ V}$ | 3.43 | 3.5 | 3.57 | V | |
| | | $I_O = 10 \text{ mA}$, $V_I = 5.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.36 | | 3.64 | | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V | |
| I_O | Output Current Limit | | 150 | | | mA | |
| ΔV_O | Line Regulation | $V_I = 4.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 3 | 20 | mV | |
| ΔV_O | Load Regulation | $V_I = 4.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV | |
| I_d | Quiescent Current | $V_I = 4.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | | 0.5 | 1 | mA |
| | | $V_I = 4.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 5.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 79 | | dB | |
| | | | $f = 1 \text{ KHz}$ | 74 | | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV | |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V | |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V | |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V | |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA | |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF | |

Table 18: Electrical Characteristics For LE40AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6 \text{ V}$ | 3.96 | 4 | 4.04 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.92 | | 4.08 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 4.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 78 | | dB |
| | | | $f = 1 \text{ KHz}$ | 73 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 19: Electrical Characteristics For LE40C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6 \text{ V}$ | 3.92 | 4 | 4.08 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 3.84 | | 4.16 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 4.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 78 | | dB |
| | | | $f = 1 \text{ KHz}$ | 73 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 20: Electrical Characteristics For LE45AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6.5 \text{ V}$ | 4.445 | 4.5 | 4.545 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.41 | | 4.59 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 5.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 5.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 77 | | dB |
| | | | $f = 1 \text{ KHz}$ | 72 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 21: Electrical Characteristics For LE45C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6.5 \text{ V}$ | 4.41 | 4.5 | 4.59 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.32 | | 4.68 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 5.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 5.5 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5.5 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 77 | | dB |
| | | | $f = 1 \text{ KHz}$ | 72 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 22: Electrical Characteristics For LE47AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6.7 \text{ V}$ | 4.653 | 4.7 | 4.747 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6.7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.606 | | 4.794 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 5.7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6.7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 77 | | dB |
| | | | $f = 1 \text{ KHz}$ | 72 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 23: Electrical Characteristics For LE47C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 6.7 \text{ V}$ | 4.606 | 4.7 | 4.794 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 6.7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.512 | | 4.888 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.4 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 5.7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 6.7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 77 | | dB |
| | | | $f = 1 \text{ KHz}$ | 72 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 24: Electrical Characteristics For LE50AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7 \text{ V}$ | 4.95 | 5 | 5.05 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.9 | | 5.1 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | 350 | 425 | mA |
| ΔV_O | Line Regulation | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 6 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 6 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 25: Electrical Characteristics For LE50C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7 \text{ V}$ | 4.9 | 5 | 5.1 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.8 | | 5.2 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | 350 | 425 | mA |
| ΔV_O | Line Regulation | $V_I = 5.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 6 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 6 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_0 | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 26: Electrical Characteristics For LE52AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7.2 \text{ V}$ | 5.148 | 5.2 | 5.252 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7.2 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 5.096 | | 5.304 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.9 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 6.2 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7.2 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 27: Electrical Characteristics For LE52C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7.2 \text{ V}$ | 5.096 | 5.2 | 5.304 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7.2 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 4.992 | | 5.408 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 5.9 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 6.2 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7.2 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 28: Electrical Characteristics For LE55AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7.5 \text{ V}$ | 5.445 | 5.5 | 5.55 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 5.39 | | 5.61 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 20 | mV |
| ΔV_O | Load Regulation | $V_I = 6.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 6.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 29: Electrical Characteristics For LE55C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 7.5 \text{ V}$ | 5.39 | 5.5 | 5.61 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 7.5 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 5.28 | | 5.72 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 6.2 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 4 | 30 | mV |
| ΔV_O | Load Regulation | $V_I = 6.5 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 6.5 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.5 | 1 | mA |
| | | $V_I = 6.5 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.5 | 3 | |
| | | $V_I = 6 \text{ V}$ | OFF MODE | 50 | 100 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 7.5 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 76 | | dB |
| | | | $f = 1 \text{ KHz}$ | 71 | | |
| | | | $f = 10 \text{ KHz}$ | 60 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 6 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 30: Electrical Characteristics For LE60AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 8 \text{ V}$ | 5.94 | 6 | 6.06 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 8 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 5.88 | | 6.12 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 6.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 25 | mV |
| ΔV_O | Load Regulation | $V_I = 7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 7 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 7 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 9 \text{ V}$ | OFF MODE | 70 | 140 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 8 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 75 | | dB |
| | | | $f = 1 \text{ KHz}$ | 69 | | |
| | | | $f = 10 \text{ KHz}$ | 57 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 9 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 31: Electrical Characteristics For LE60C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|--|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 8 \text{ V}$ | 5.88 | 6 | 6.12 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 8 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 5.76 | | 6.24 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 6.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 35 | mV |
| ΔV_O | Load Regulation | $V_I = 7 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 7 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 7 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 9 \text{ V}$ | OFF MODE | 70 | 140 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 8 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 75 | | dB |
| | | | $f = 1 \text{ KHz}$ | 69 | | |
| | | | $f = 10 \text{ KHz}$ | 57 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 9 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 32: Electrical Characteristics For LE80AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|---|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 10 \text{ V}$ | 7.92 | 8 | 8.08 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 10 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 7.84 | | 8.16 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 8.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 25 | mV |
| ΔV_O | Load Regulation | $V_I = 9 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 9 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 9 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 9 \text{ V}$ | OFF MODE | 70 | 140 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 10 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 72 | | dB |
| | | | $f = 1 \text{ KHz}$ | 66 | | |
| | | | $f = 10 \text{ KHz}$ | 57 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 9 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 33: Electrical Characteristics For LE80C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_0 = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|---|----------------------|------|------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 10 \text{ V}$ | 7.84 | 8 | 8.16 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 10 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 7.68 | | 8.32 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 8.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 35 | mV |
| ΔV_O | Load Regulation | $V_I = 9 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 9 \text{ to } 18\text{V}$, $I_O = 0\text{mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 9 \text{ to } 18\text{V}$, $I_O = 100\text{mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 9 \text{ V}$ | OFF MODE | 70 | 140 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 10 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 72 | | dB |
| | | | $f = 1 \text{ KHz}$ | 66 | | |
| | | | $f = 10 \text{ KHz}$ | 57 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 9 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 34: Electrical Characteristics For LE120AB (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|---|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 14 \text{ V}$ | 11.88 | 12 | 12.12 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 14 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 11.76 | | 12.24 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 12.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 25 | mV |
| ΔV_O | Load Regulation | $V_I = 13 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 15 | mV |
| I_d | Quiescent Current | $V_I = 13 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 13 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 13 \text{ V}$ | OFF MODE | 90 | 180 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 14 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 69 | | dB |
| | | | $f = 1 \text{ KHz}$ | 63 | | |
| | | | $f = 10 \text{ KHz}$ | 55 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 13 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

Table 35: Electrical Characteristics For LE120C (refer to the test circuits, $T_j = 25^\circ\text{C}$, $C_1 = 0.1 \mu\text{F}$, $C_O = 2.2 \mu\text{F}$ unless otherwise specified.)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------|---|----------------------|------|-------|---------------|
| V_O | Output Voltage | $I_O = 10 \text{ mA}$, $V_I = 14 \text{ V}$ | 11.76 | 12 | 12.24 | V |
| | | $I_O = 10 \text{ mA}$, $V_I = 14 \text{ V}$, $T_a = -25 \text{ to } 85^\circ\text{C}$ | 11.52 | | 12.48 | |
| V_I | Operating Input Voltage | $I_O = 100 \text{ mA}$ | | | 18 | V |
| I_O | Output Current Limit | | 150 | | | mA |
| ΔV_O | Line Regulation | $V_I = 12.7 \text{ to } 18 \text{ V}$, $I_O = 0.5 \text{ mA}$ | | 5 | 35 | mV |
| ΔV_O | Load Regulation | $V_I = 13 \text{ V}$, $I_O = 0.5 \text{ to } 100 \text{ mA}$ | | 3 | 25 | mV |
| I_d | Quiescent Current | $V_I = 13 \text{ to } 18 \text{ V}$, $I_O = 0 \text{ mA}$ | ON MODE | 0.7 | 1.6 | mA |
| | | $V_I = 13 \text{ to } 18 \text{ V}$, $I_O = 100 \text{ mA}$ | | 1.7 | 3.6 | |
| | | $V_I = 13 \text{ V}$ | OFF MODE | 90 | 180 | μA |
| SVR | Supply Voltage Rejection | $I_O = 5 \text{ mA}$ $V_I = 14 \pm 1 \text{ V}$ | $f = 120 \text{ Hz}$ | 69 | | dB |
| | | | $f = 1 \text{ KHz}$ | 63 | | |
| | | | $f = 10 \text{ KHz}$ | 55 | | |
| eN | Output Noise Voltage | $B = 10 \text{ Hz to } 100 \text{ KHz}$ | | 50 | | μV |
| V_d | Dropout Voltage | $I_O = 100 \text{ mA}$ | | 0.2 | 0.4 | V |
| | | $I_O = 100 \text{ mA}$, $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.5 | |
| V_{IL} | Control Input Logic Low | $T_a = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control Input Logic High | $T_a = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_I | Control Input Current | $V_I = 13 \text{ V}$, $V_C = 6 \text{ V}$ | | 10 | | μA |
| C_O | Output Bypass Capacitance | $\text{ESR} = 0.1 \text{ to } 10 \Omega$, $I_O = 0 \text{ to } 100 \text{ mA}$ | 2 | 10 | | μF |

TYPICAL PERFORMANCE CHARACTERISTICS (unless otherwise specified $V_{O(NOM)} = 3.3\text{ V}$)

Figure 3: Dropout Voltage vs Output Current

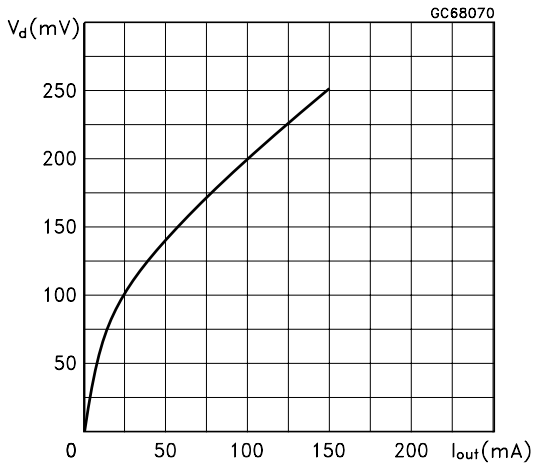


Figure 4: Dropout Voltage vs Temperature

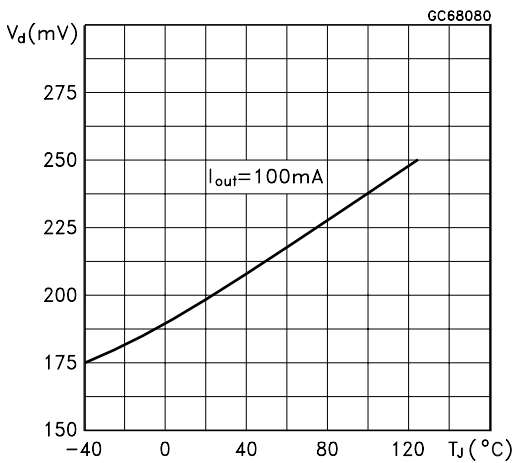


Figure 5: Supply Current vs Temperature

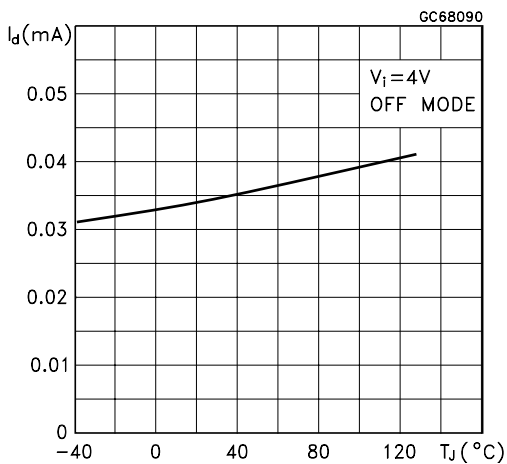


Figure 6: Supply Current vs Input Voltage

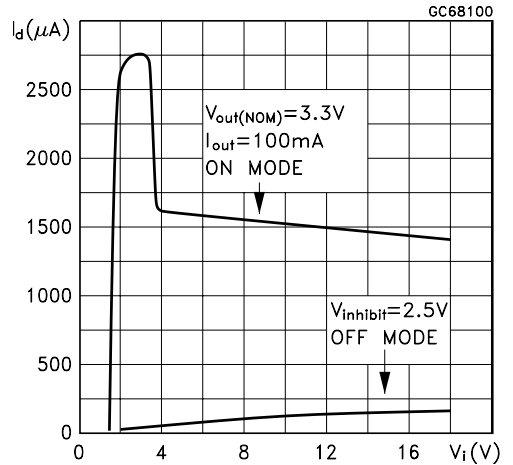


Figure 7: Short Circuit Current vs Dropout Voltage

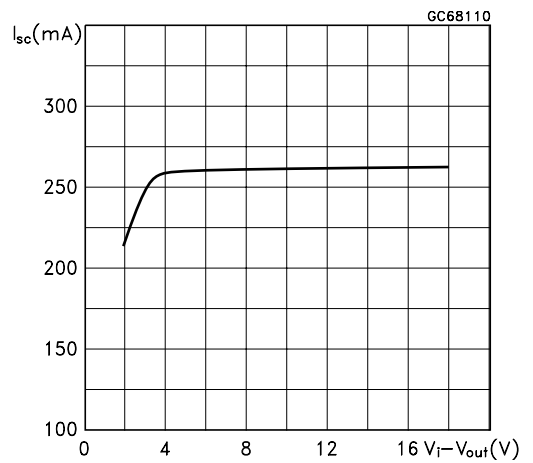


Figure 8: S.V.R. vs Frequency

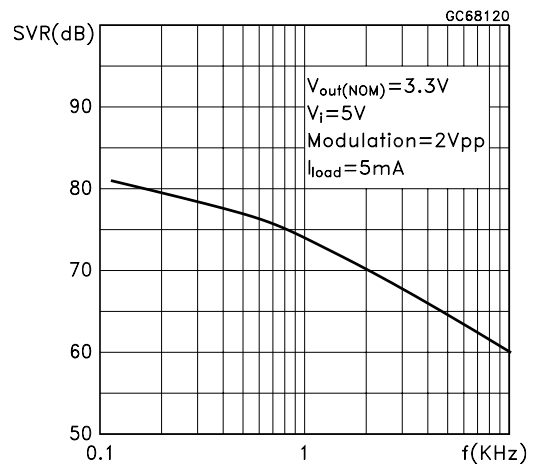


Figure 9: Logic Controlled Precision 3.3/5.0V Selectable Output

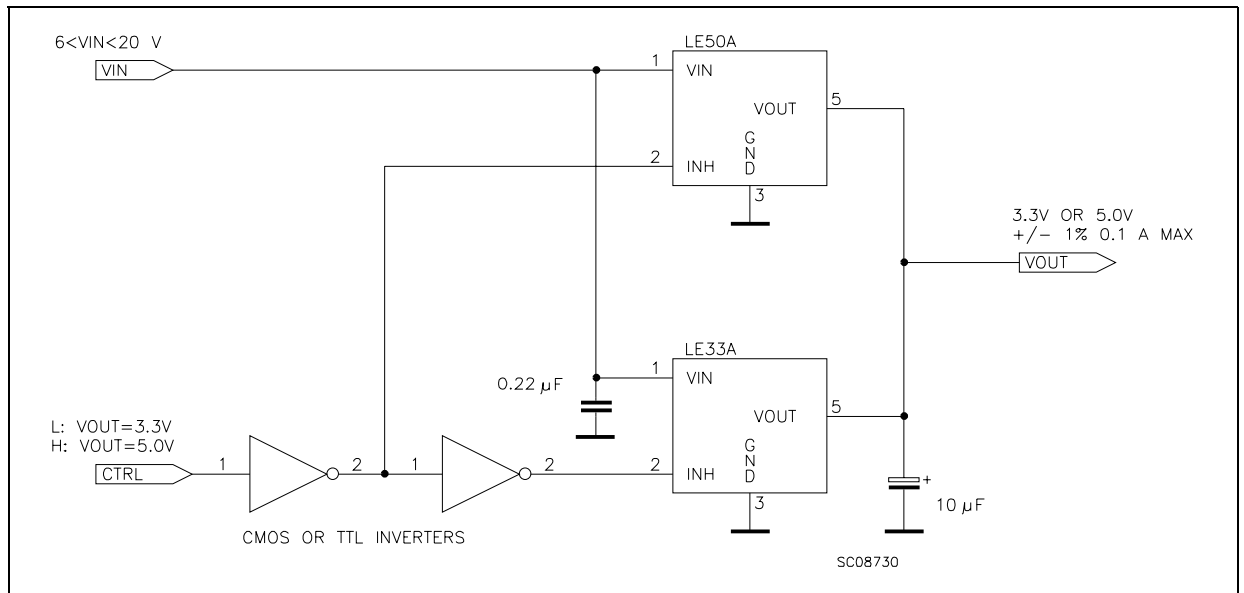


Figure 10: Sequential Multi-Output Supply

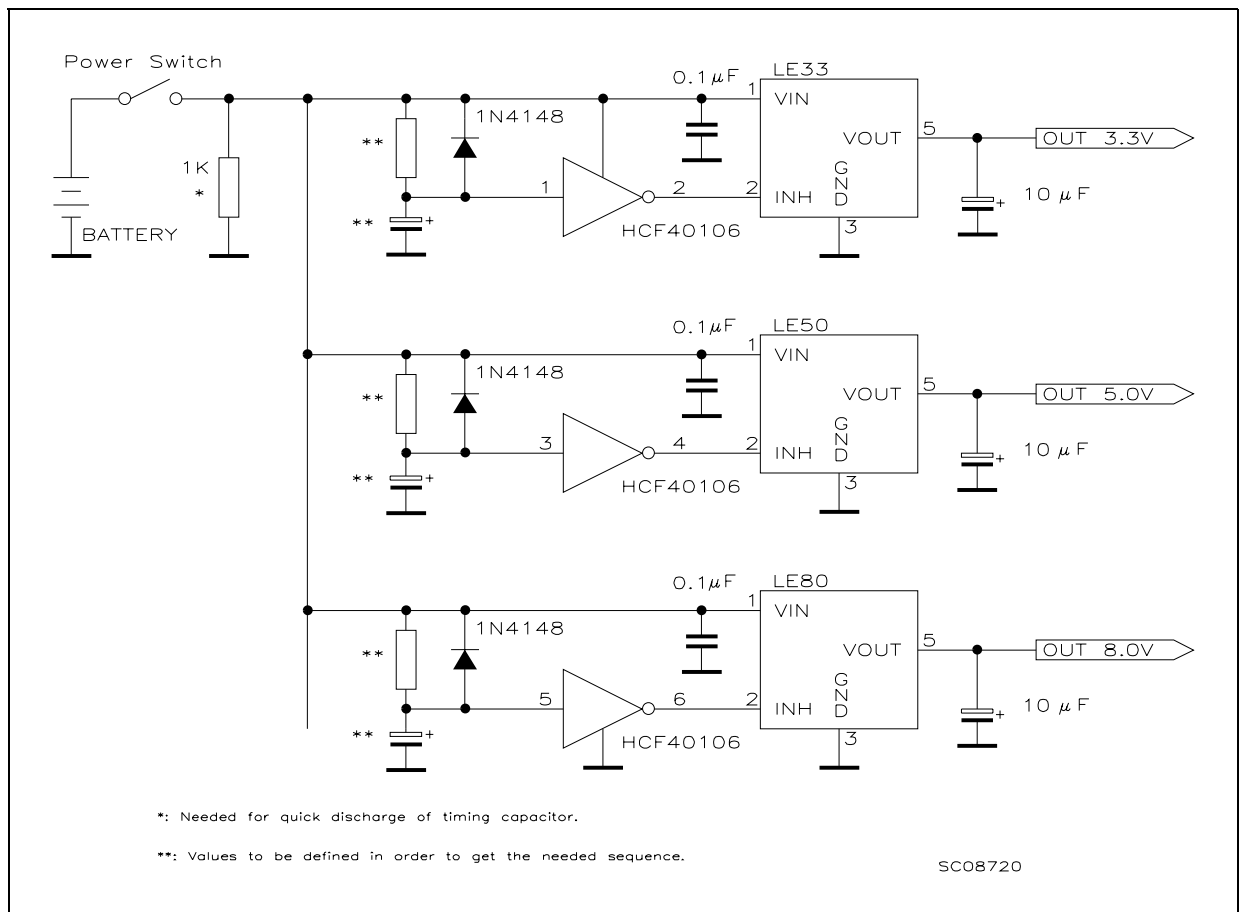


Figure 11: Multiple Supply With ON/OFF Toggle Switch



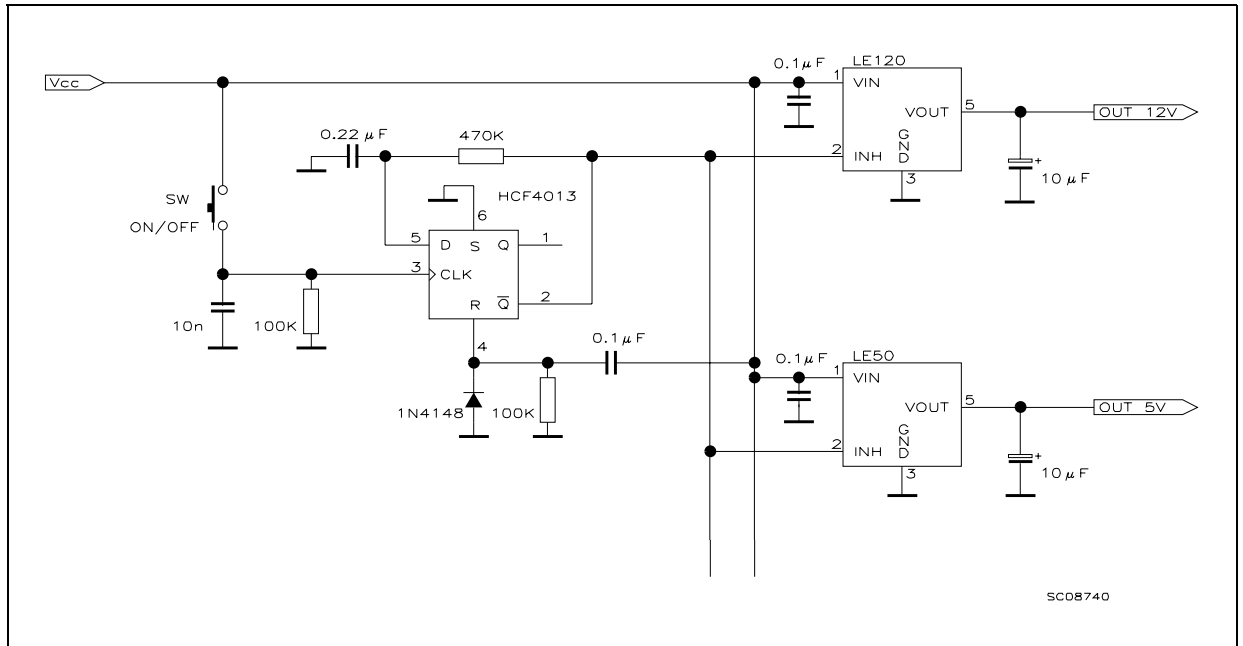


Figure 12: Basic Inhibit Functions

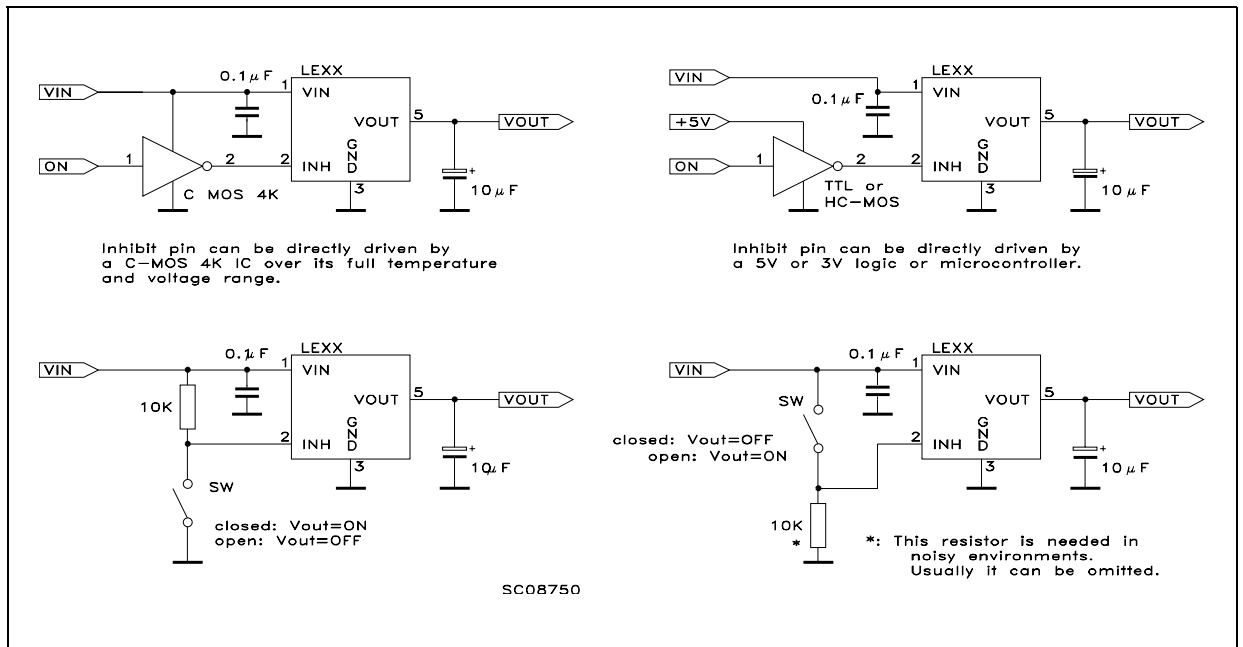

SO-8 MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|------|--------------------|------|------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 1.35 | | 1.75 | 0.053 | | 0.069 |
| A1 | 0.10 | | 0.25 | 0.04 | | 0.010 |
| A2 | 1.10 | | 1.65 | 0.043 | | 0.065 |
| B | 0.33 | | 0.51 | 0.013 | | 0.020 |
| C | 0.19 | | 0.25 | 0.007 | | 0.010 |
| D | 4.80 | | 5.00 | 0.189 | | 0.197 |
| E | 3.80 | | 4.00 | 0.150 | | 0.157 |
| e | | 1.27 | | | 0.050 | |
| H | 5.80 | | 6.20 | 0.228 | | 0.244 |
| h | 0.25 | | 0.50 | 0.010 | | 0.020 |
| L | 0.40 | | 1.27 | 0.016 | | 0.050 |
| k | 8° (max.) | | | | | |
| ddd | | | 0.1 | | | 0.04 |

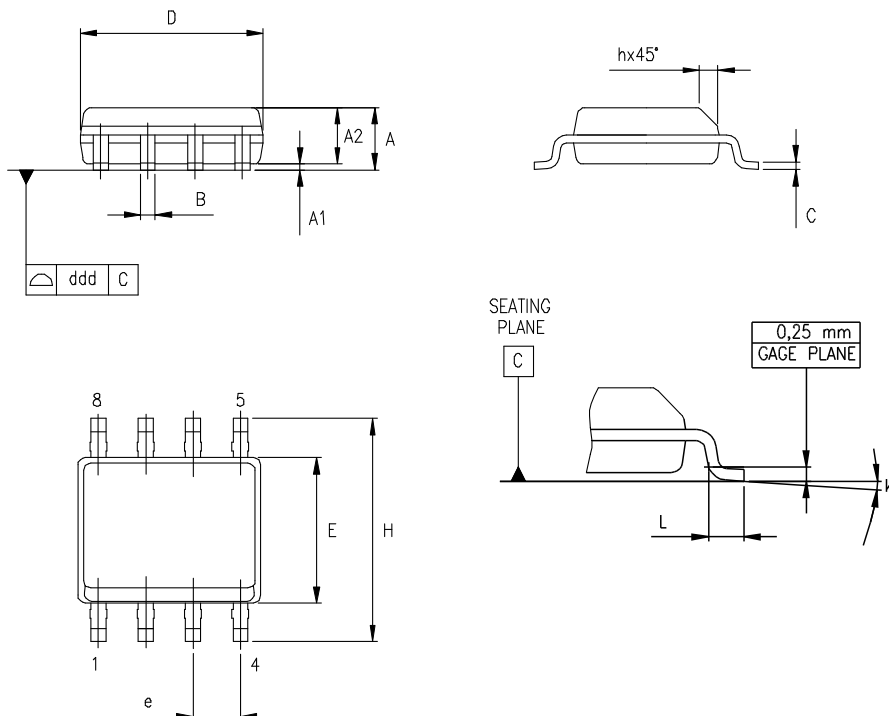

0016023/C

TO-92 MECHANICA DATA

| DIM. | mm. | | | mils | | |
|------|------|-----|-------|-------|------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.32 | | 4.95 | 170.1 | | 194.9 |
| b | 0.36 | | 0.51 | 14.2 | | 20.1 |
| D | 4.45 | | 4.95 | 175.2 | | 194.9 |
| E | 3.30 | | 3.94 | 129.9 | | 155.1 |
| e | 2.41 | | 2.67 | 94.9 | | 105.1 |
| e1 | 1.14 | | 1.40 | 44.9 | | 55.1 |
| L | 12.7 | | 15.49 | 500.0 | | 609.8 |
| R | 2.16 | | 2.41 | 85.0 | | 94.9 |
| S1 | 0.92 | | 1.52 | 36.2 | | 59.8 |
| W | 0.41 | | 0.56 | 16.1 | | 22.0 |

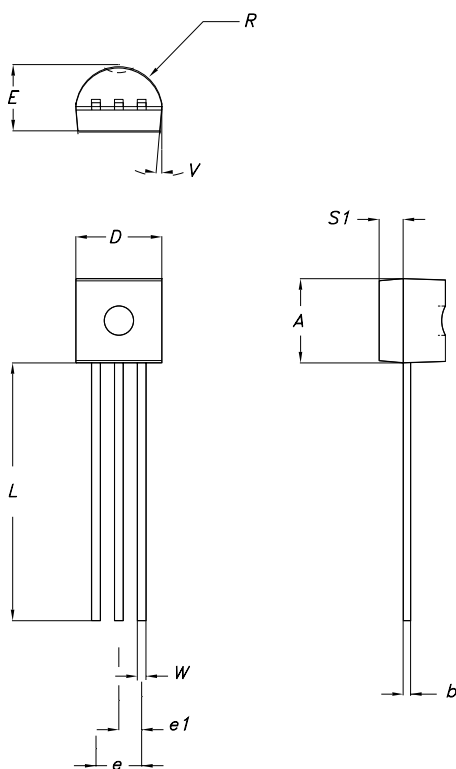

0102782/C

Tape & Reel SO-8 MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|-----|------|-------|------|--------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 330 | | | 12.992 |
| C | 12.8 | | 13.2 | 0.504 | | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 22.4 | | | 0.882 |
| Ao | 8.1 | | 8.5 | 0.319 | | 0.335 |
| Bo | 5.5 | | 5.9 | 0.216 | | 0.232 |
| Ko | 2.1 | | 2.3 | 0.082 | | 0.090 |
| Po | 3.9 | | 4.1 | 0.153 | | 0.161 |
| P | 7.9 | | 8.1 | 0.311 | | 0.319 |

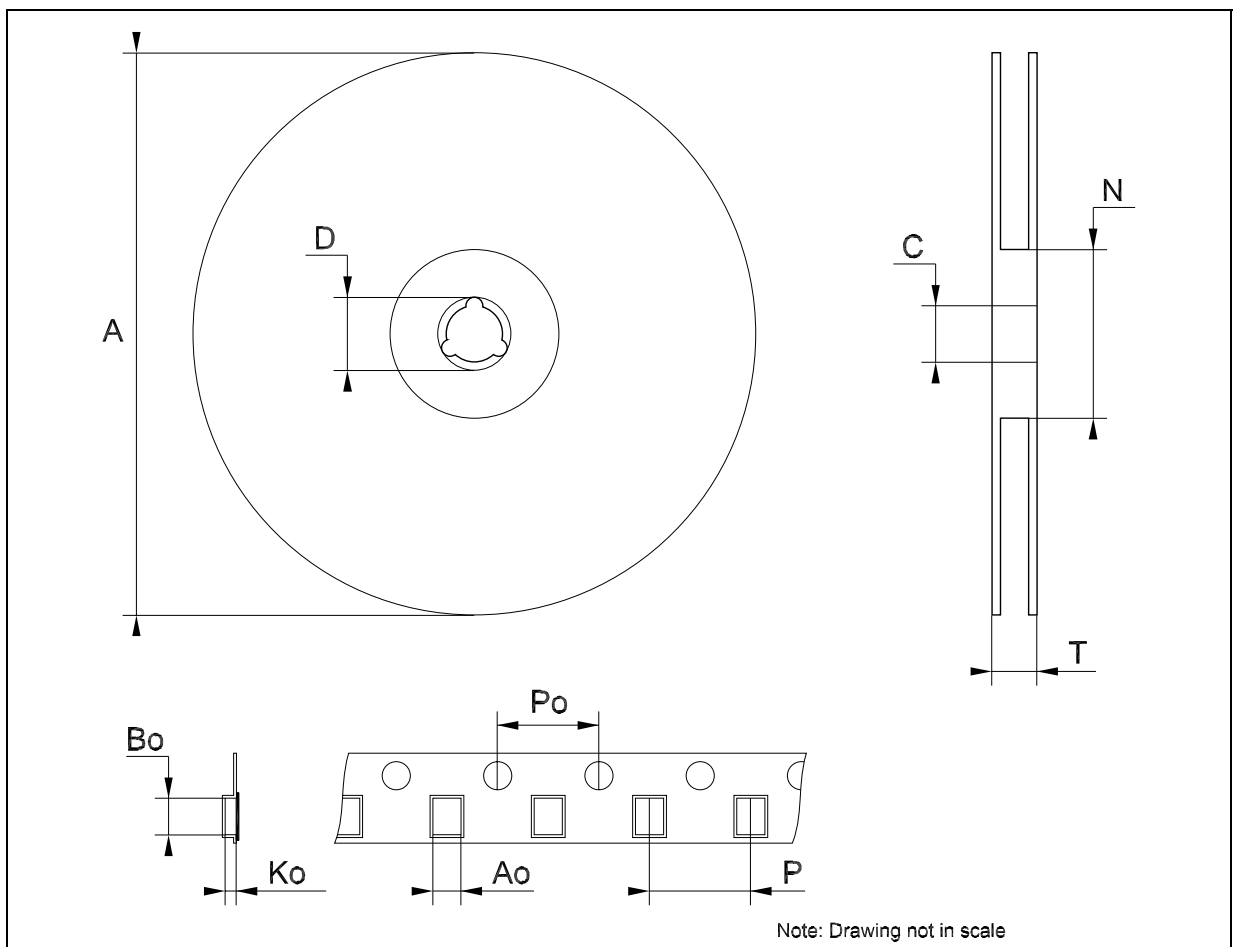


Table 36: Revision History

| Date | Revision | Description of Changes |
|-------------|-----------------|--|
| 09-Jul-2004 | 6 | I _O typ. and max. are changed in tab. 24 and 25 - pag 14. |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.
<http://www.st.com>